



High Pressure FRL

Engineered for High Pressure. Built for Reliability



Salient Features


- Working Pressure upto 17 bar
- Robust metal body
- Modular & Compact construction
- Accurate pressure control
- Manual Drain
- 'Push to Lock' regulator knob

Mercury Pneumatics Pvt. Ltd.

C-105, Ansa Industrial Estate, Saki Vihar Rd, Andheri (E),
Mumbai - 400072. India. Phone: +91-22-40151020


E-mail: contactus@mercuryindia.net Website: www.mercuryindia.net

FILTER REGULATOR + LUBRICATOR

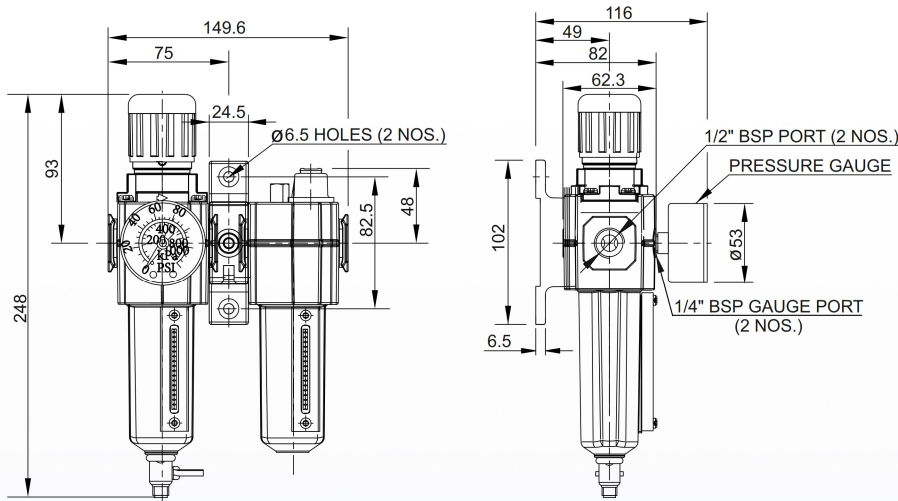


MODEL :- HFRL 04	
Port	1/2" BSP
Pressure Range	0.5 ~ 17 kgf/sq.cm
Temperature	-5 to 80° C
Filtering Density	40 μm
Fluid	Air
Max. Flow Rate	1700 lit/min.(LPM)
Recommended Oil	ISO-VG32
Pressure Gauge Port	1/4" BSP
Bowl Material	Aluminium
Weight	1.60 kg.

FILTER REGULATOR

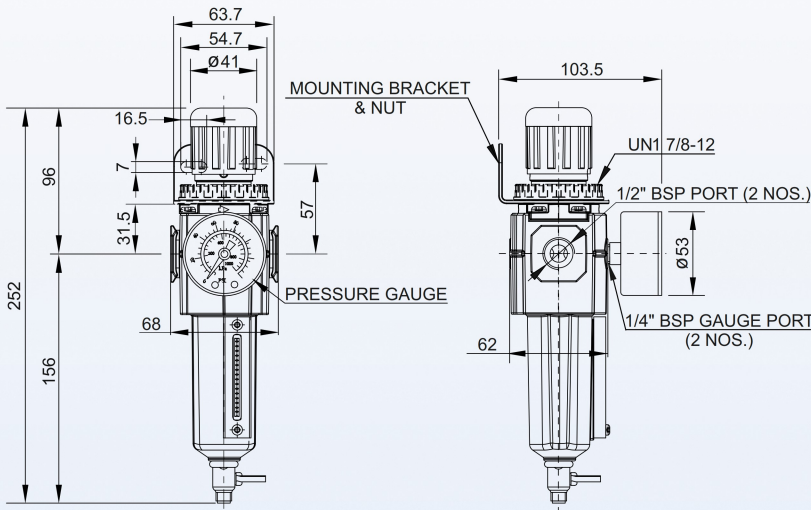

MODEL :- HFR 04	
Port	1/2" BSP
Pressure Range	0.5 ~ 17 kgf/sq.cm
Temperature	-5 to 80° C
Filtering Density	40 μm
Fluid	Air
Max. Flow Rate	3228 lit/min.(LPM)
Pressure Gauge Port	1/4" BSP
Bowl Material	Aluminium
Weight	0.90 kg.

REGULATOR

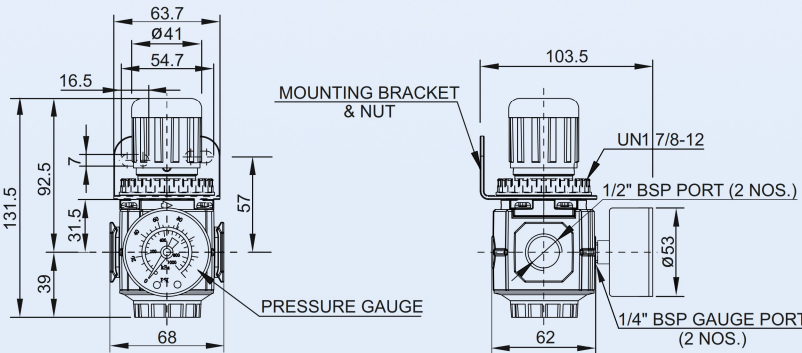

MODEL :- HR 04	
Port	1/2" BSP
Pressure Range	0.5 ~ 17 kgf/sq.cm
Temperature	-5 to 80° C
Fluid	Air
Pressure Gauge Port	1/4" BSP
Max. Flow Rate	4078 lit/min.(LPM)
Weight	0.70 kg.