



Leadership through innovation

2/2 High Pressure Valves

High Performance, Long Life High Pressure Valves for Semi & Fully Automatic "PET" Blow Moulding Machines

Internal Pilot Series



Salient Features

- Compact
- Robust
- Manifold Mounted
- M32 Coils
- Longer life with Polymer Seals

External Pilot Series



Salient Features

- Faster Response Time
- Robust
- Manifold Mounted
- M22 Coils
- Longer life with Polymer Seals

Specifications			
Internal Pilot Valve	Model No.: P114H	Model No.: P115H	Model No.: P116H
External Pilot Valve	Model No.: NPC114EH	Model No.: NPC115EH	Model No.: NPC116EH
Port Size	1/2" BSP	3/4" BSP	1" BSP
Orifice	13mm	16mm	24.5mm
Design	Poppet Type		
Operating Pressure	5 to 40 bar		
* Ext. Pilot Pressure	3 to 8 bar		
* Ext. Pilot Connection	4mm O.D		
Seals	Polymer		
Body M.O.C	Aluminium, Hard Anodized		
Coil Voltage	230VAC / 24 VDC		

* Only for External Pilot Valve


Mercury Pneumatics Pvt. Ltd.

C-105, Ansa Industrial Estate, Saki Vihar Rd, Andheri (E),
Mumbai - 400072. India. Phone: +91-22-40151020


E-mail: contactus@mercuryindia.net Website: www.mercuryindia.net

Dimensional Layouts :


Model No. : P114H

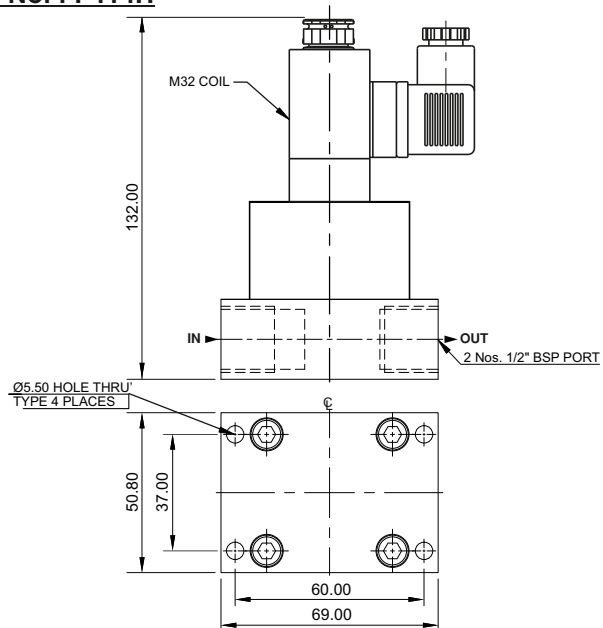


Model No. : NPC114EH

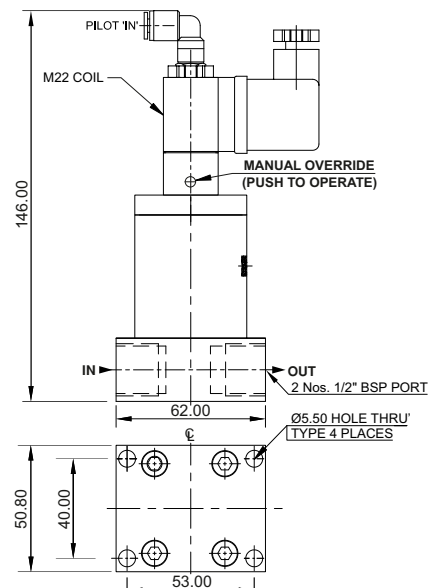


Model No. : P115H

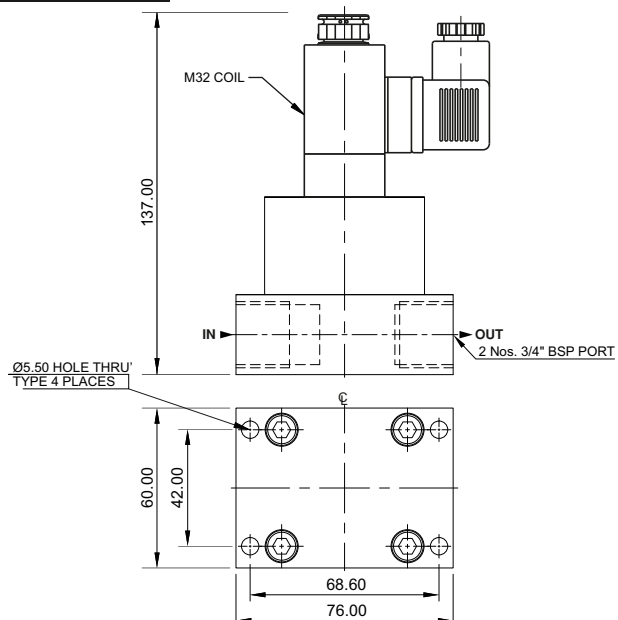

Model No. : NPC115EH

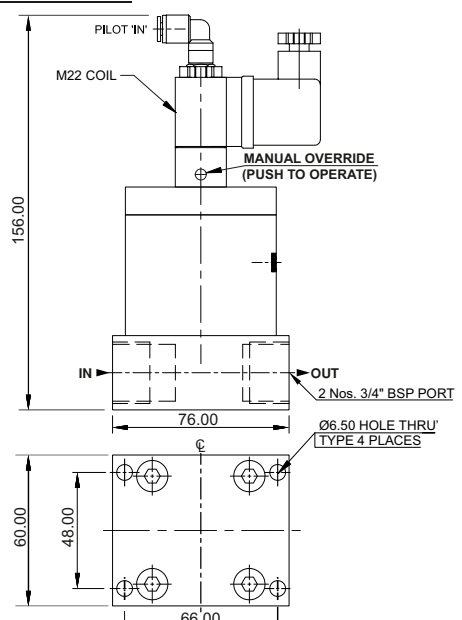

Model No. : P116H

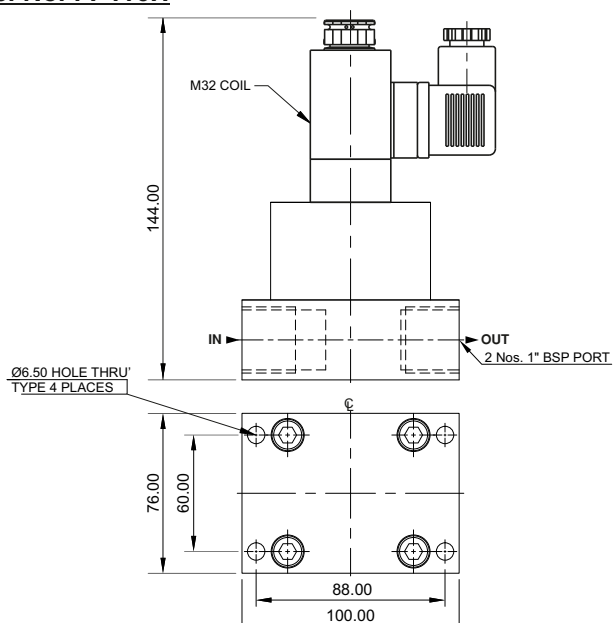

Model No. : NPC116EH

