



Single Acting Air Return Cylinder

For Power Press

MERCURY

Mechanical Characteristic


Barrel	: Mild Steel
Piston Rod	: Carbon Steel
End Cover & Piston	: C.I Casting
Seals	: Nitrile Rubber
Bore	: Ø80, Ø100, Ø160, Ø200 mm.
Stroke	: 200, 225, 300, 325, 375, 450 mm.
Type	: Single Acting air return
Cushioning	: Fixed

Operating Conditions


Media	: Air (filtered 40 μ & lubricated)
Temperature Range	: +5° to +50°C
Pressure Range	: 1 to 10 bar
Leakage	: Bubble Tight



Dimensional Layout

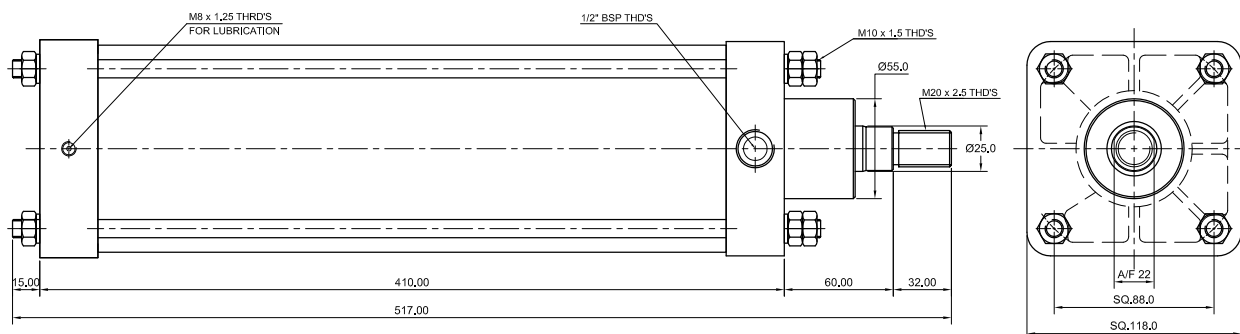

MODEL No.	DESCRIPTION	SYMBOL	SEAL KIT No.
SPC1097	Ø100 SINGLE ACTING AIR RETURN CYLINDER		69-085

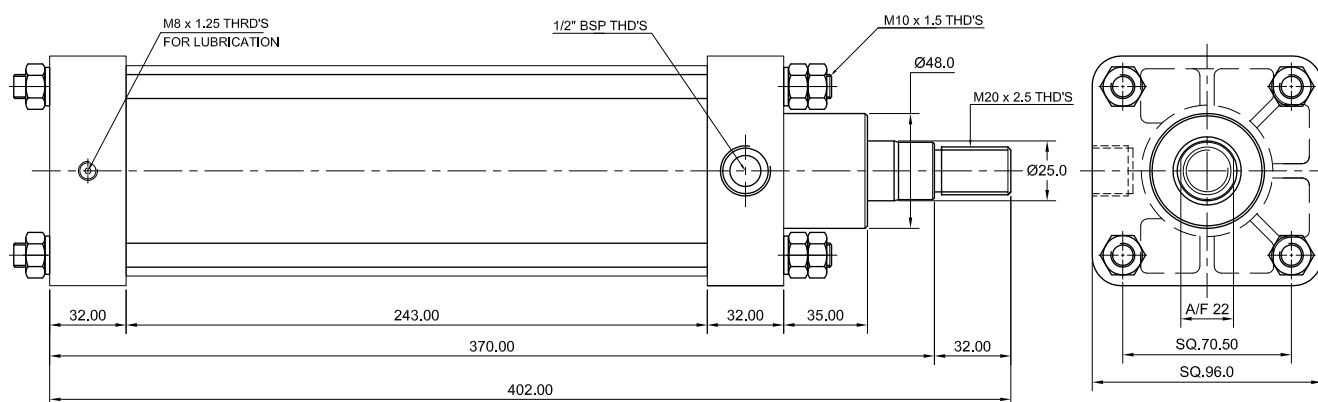

MODEL No.	DESCRIPTION	SYMBOL	SEAL KIT No.
SPC1098	Ø80 SINGLE ACTING AIR RETURN CYLINDER		69-092




Single Acting Air Return Cylinder


For Power Press



Dimensional Layout

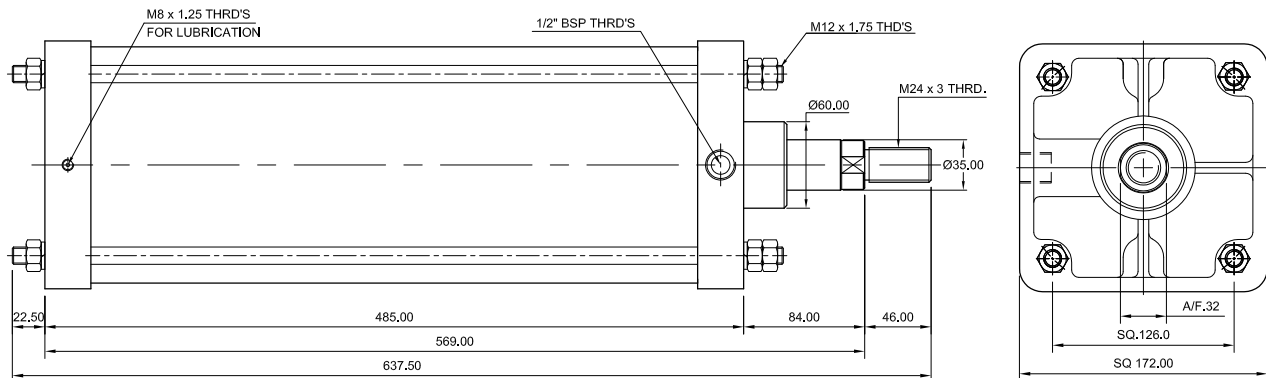

MODEL No.	DESCRIPTION	SYMBOL	SEAL KIT No.
SPC1117	Ø160 SINGLE ACTING AIR RETURN CYLINDER		69-101

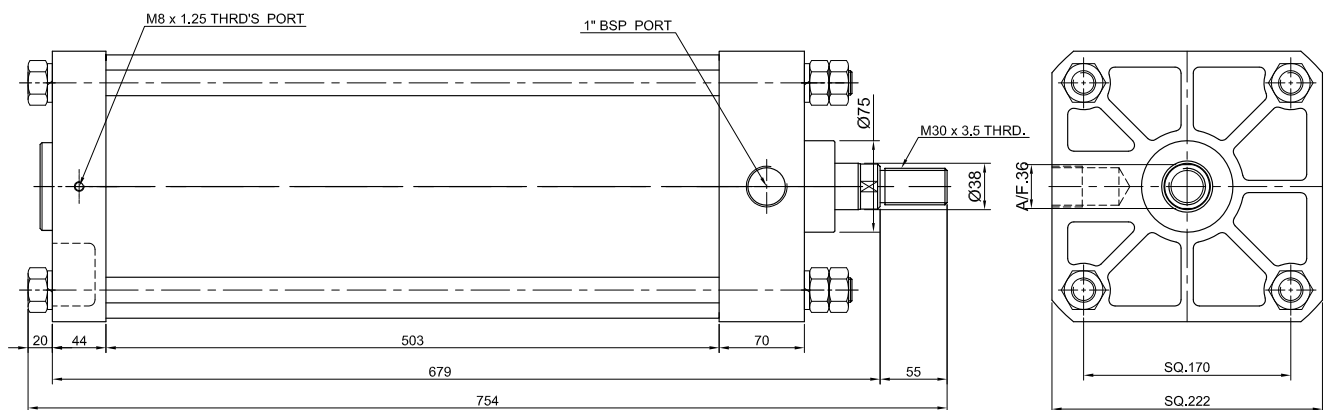

MODEL No.	DESCRIPTION	SYMBOL	SEAL KIT No.
SPC1122	Ø200 SINGLE ACTING AIR RETURN CYLINDER		69-115